


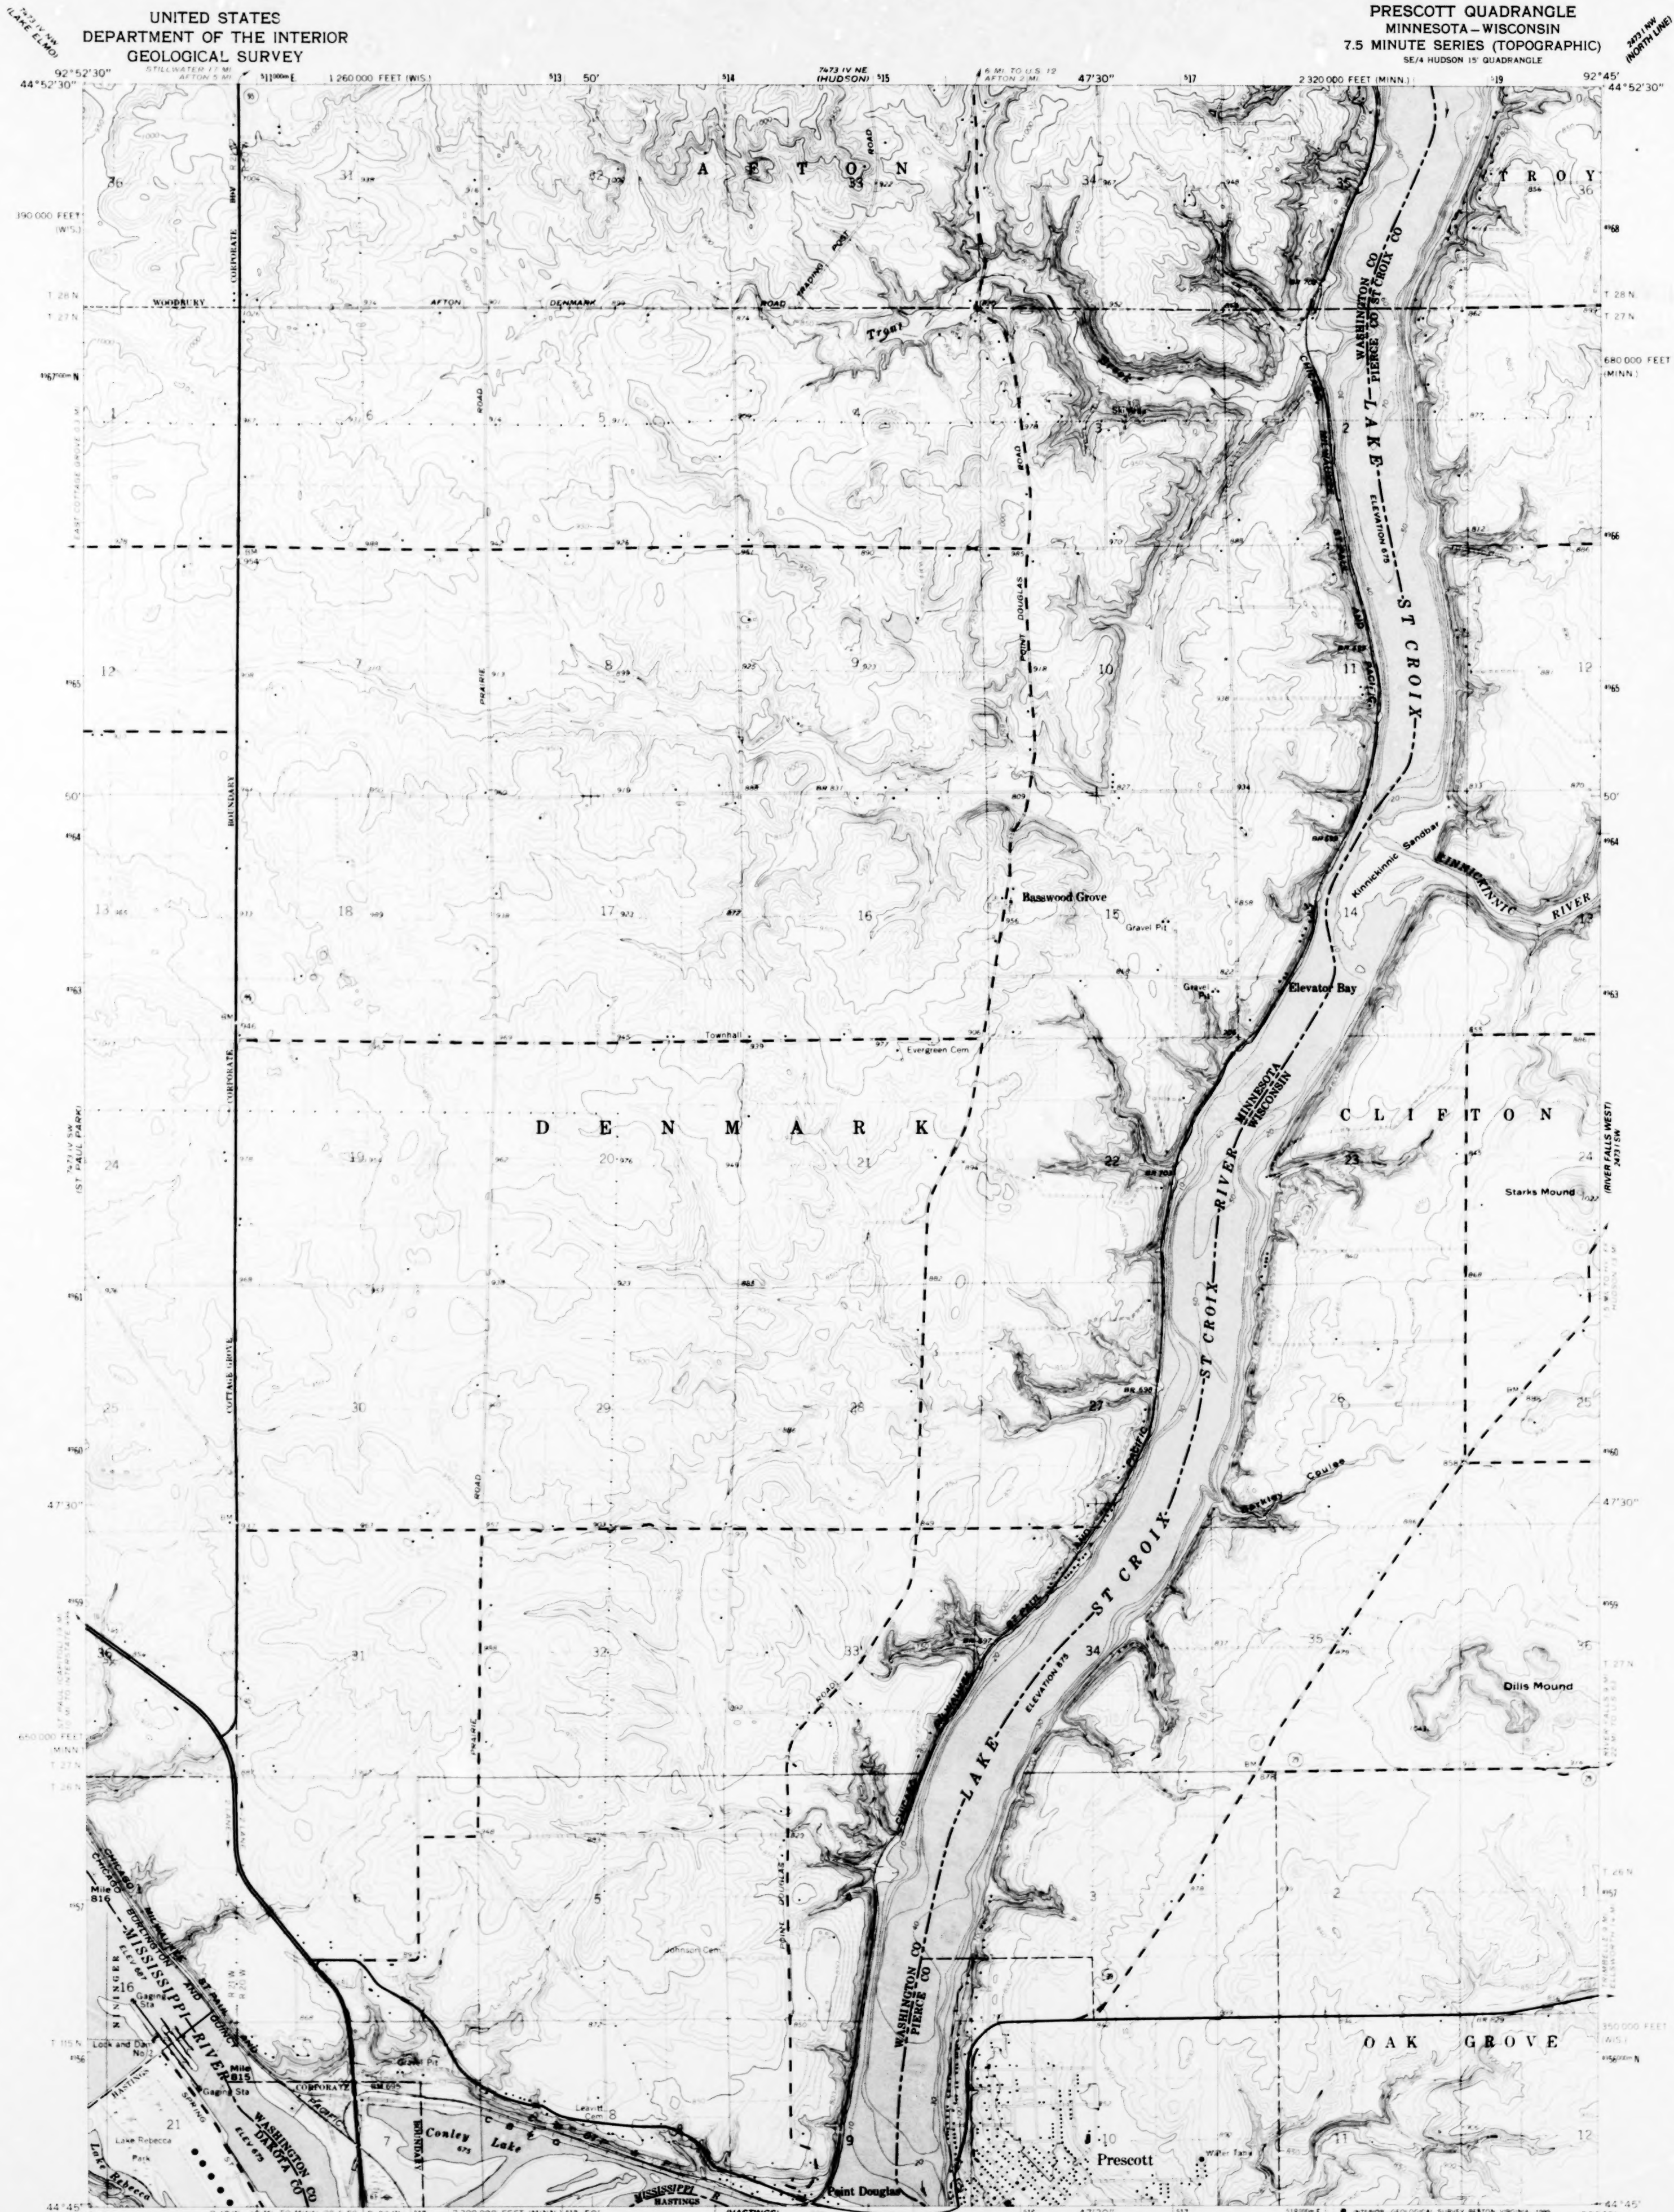

Maped, edited, and published by the Geological Survey in cooperation with Minnesota Department of Administration Control by USGS and USC&GS

Topography by photogrammetric methods from aerial photographs taken 1947. Field checked 1950. Revised 1967

Depth curves compiled from charts furnished by Minnesota Department of Conservation

Polyconic projection. 1927 North American datum. 10,000 foot grids based on Minnesota coordinate system, south zone and Wisconsin coordinate system, central zone. 1000-meter Universal Transverse Mercator grid ticks, zone 15, shown in blue

Fine red dashed lines indicate selected fence and field lines where generally visible on aerial photographs. This information is unchecked

Map photospected 1977

No major culture or drainage changes observed

UTM GRID AND 1967 MAGNETIC NORTH DECLINATION AT CENTER OF SHEET

SCALE 1:24,000

CONTOUR INTERVAL 10 FEET

NATIONAL GEODETIC DATUM OF 1929

ROAD CLASSIFICATION

Heavy-duty ——— Light-duty ———

Medium-duty - - - - - Unimproved dirt ———

U.S. Route ——— State Route ———

PRESCOTT, MINN. - WIS.

SE 1/4 HUDSON 15 QUADRANGLE

44092 G7 1F 024

1967

PHOTOINSPECTED 1977

DMA 7471 IV SE-SERIES V872

THIS MAP COMPLIES WITH NATIONAL MAP ACCURACY STANDARDS

FOR SALE BY U.S. GEOLOGICAL SURVEY, DENVER, COLORADO 80225, OR RESTON, VIRGINIA 22092

AND WISCONSIN GEOLOGICAL AND NATURAL HISTORY SURVEY, MADISON, WISCONSIN 53706

A FOLDER DESCRIBING TOPOGRAPHIC MAPS AND SYMBOLS IS AVAILABLE ON REQUEST

To place on the predicted North American Datum 1983, move the projection lines 7 meters north and 16 meters east as shown by dashed corner ticks

QUADRANGLE LOCATION